


How to install your enclosure?

■ Wall mount



SAH725/SLI070/SCR500 + SAB754
SAS725 sunshield

■ Corner mount with housing

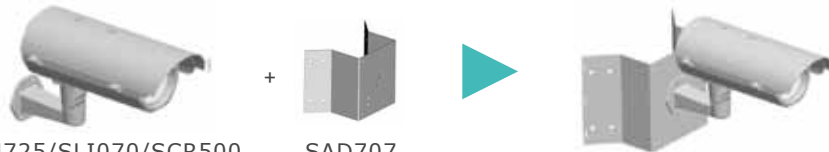


SAH725/SLI070/SCR500 + SAB754

SAD707



SCR875



SAD707



SAB754



SAD707

■ Pole mount with housing



SAH725/SLI070/SCR500 + SAB754

SAD708



SCR875



SAD708



SAB755



SAD708

How to install your vandal proof dome camera?

■ Wall mount



■ In-ceiling mount



■ Wall mount adaptor



SAB749-1W for
SDF412/SDF416U /
SDF417U/SDR431U/
NIC830/NDF820/
NDF821/NDF831

■ Wall mount bracket(cable management)



SAB755 for SDF416U/
SDF417U/SDR431U/NDR890/
NDF820/NDF821/NDF831

Video Splitter



Mode	SIQ040	SIM160
Motion detection	v	v
Time/Date	v	v
Buzzer	v	v
key Lock	No	v
Camera inputs	4(BNC, composite video)	16(BNC, composite video)
Looping through output	No	16(BNC, composite video)
Monitor/VCR Output	1/1(BNC, composite video)	1/1(BNC, composite video)
Playback Input	1(BNC, composite video)	1(BNC, composite video)
Power	DC12V, 500mA, Max. 3 Watts	DC12V, 1.2A, Max. 11 Watts
Dimensions	220mm x 140mm x 50mm (8 3/5"x5 1/5"x2")	430mmx248mmx50mm (17"x3/4" x2")

Control panel



Model	SAC762 Speed dome control panel
Interface	RS-485, RS-422, RS232
Protocol	Pelco P(MESSOA P), Pelco D(MESSOA D)
Baud rate	1200, 2400, 4800, 9600
Joystick	3-Axis
Display	LCD
Compatible	SDS700/NIC900

Lens



Model NO.	IR-corrected	Megapixel	Image Size (inches)	Focal Length (mm)	Iris Range	Mount	Angle of view (Horizontal)	M.O.D. (M)	Control			Dimensions	Weight (g)
									Iris	Focus	Zoom		
SLV521	v		1/3"	3-8	0.95-360	CS	94.3° ~ 36°	0.3	Auto(DC)	Manual	Manual	38x48x49.7mm	64
SLV522	v	v	1/3"	3.0-8.5	1-360	CS	90° ~ 33.6°	0.2	Auto(DC)	Manual	Manual	35x47.4x46mm	55
SLV524	v		1/3"	2.7-12	1.2-360	CS	97.4° ~ 23.8°	0.3	Auto(DC)	Manual	Manual	50x39x57mm	72
SLV524PRO	v	v	1/3"	2.8-12	1.2-360	CS	98.5° ~ 23.8°	0.2	Auto(DC)	Manual	Manual	35x47.9x53.3mm	58
SLV525		v	1/3"	2.8-8	1.2~360	CS	100° ~ 35.3°	0.3	Auto(DC)	Manual	Manual	57.3 x 54.6 x 47.1mm	60
SLV525-MI		v	1/3"	2.8-8	1.2-360	CS	100° ~ 35.3°	0.3	Manual	Manual	Manual	55.3x37.5x45.5mm	55
SLV532	v	v	1/3"	7.5-50	1.3~360	CS	36.6° ~ 5.64°	0.4	Auto(DC)	Manual	Manual	38 x 50.1 x 55.2mm	68
SLV562	v		1/3"	5.0-60	1.4~360	CS	52.5° ~ 4.6°	0.3	Auto(DC)	Manual	Manual	39.5 x 47.0 x 62.5mm	123
SLV563			1/2"	10-120	1.6~360	C or CS	34.7° ~ 3.10°	1.5	Auto(DC)	Manual	Manual	55 x 64.3 x 123.2mm	123
SLV563PRO	v		1/2"	10-120	1.6~360	C or CS	34.7° ~ 3.10°	1.5	Auto(DC)	Manual	Manual	55 x 64.3 x 123.2mm	123



Power Adaptor



Model	SAA771	SAA772	SAA773
Description	Switching power adaptor	Switching power adaptor	Transformer power adaptor
Power input	Universal input from AC90~260V	Universal input from AC90~260V	AC90~260V
Power output	DC12V, 0.5A	DC12V, 1.25A	AC24V, 2.4A
Options	SAA771-EU-2: European power cord SAA771-US-2: USA power cord	SAA772-EU-2: European power cord SAA772-US-2: USA power cord	SAA773-EU: European power cord (220-260V) SAA773-UK: UK power cord (220-260V) SAA773-US: USA power cord (90V-110V)

Housing



Model	SAH725+SAB754	SLI070+SAB754	SAS725	SAD711
Description	Side opening housing	Side opening IR housing	Sunshield	Vandal proof dome enclosure
Construction	Die-cast Aluminum	Die-cast Aluminum	ABS	Die-cast Aluminum
Color	White	White	White/Black	White
Dimensions (LxWxH)	422 x 174 x 145 mm 16.6"x6.9"x5.7"	422 x 174 x 145 mm 16.6"x6.9"x5.7"	425 x 180.5 x 73 mm 16.7"x7.1"x2.9"	360 x 217mm 14.2"x 8.55"
Weight	3kg; 6.6lb	3kg; 6.6lb	0.3 kg; 0.66lb	2.5 Kg; 5.5 lb
IR distance	-	70M (230 ft.)	-	-
Water proof	IP67	IP67	-	IP67
Vandal proof	v	v	-	v
Internal cable channel	SAH725H-2(w/heater AC24V)	SLI070HB-N7(AC230V)	-	v
Options	SAH725H-7 (w/heater, AC230V) SAH725HB-2 (w/heater,blower, AC24V) SAH725HB-7 (w/heater, blower, AC230V)	SLI070HB-P2 (w/heater, blower, AC24V, PAL:50Hz) SLI070HB-P7 (w/heater; blower, AC230V, PAL:50Hz) SLI070HB-N2 (w/heater, blower, AC24V, NTSC:60Hz)	-	w/heater, blower, AC24V
Compatible model	All box type cameras	All box type cameras	SAH725/SLI070/SCR510/ SCR515PRO/NCR536	NDZ860
Load	25 kg (55 lbs)	25 kg (55 lbs)	0.4 kg (0.88 lbs)	3 kg (6.6 lbs)

Bracket



Model	SAB748-02	SAB754	SAB749-W1	SAB755	SAB755M
Description	Camera small bracket	Wall mount bracket	Vandal dome wall mount bracket	Vandal dome wall mount bracket	Ceiling mount type bracket
Construction	Aluminum	Die-cast Aluminum	Aluminum	Die-cast Aluminum	Die-cast Aluminum
Color	Silver	White/Black	White	White	White
Internal cable channel	-	v	-	v	-
Dimensions(LxWxH)	Max 175mm; 6.9" Min115mm; 4.5"	172 x 144 x 114 mm 6.7"x5.7"x4.5"	205 x 160 x 110 mm 8.1"x6.3"x4.3"	Φ150X245X150 mm 5.9" x 9.65" x 5.9"	Φ150X60 mm 5.9"x 2.4"
Weight(Approx.)	0.02Kg (0.04 lbs); Load: 3-5Kg(6 lbs-11 lbs)	1kg (2.2 lb)	1 kg (2.2 lb)	1.05 kg (2.55 lb)	0.23 kg (0.5 lb)
Compatible model	All box type camera (MOQ=20 pcs)	SAH725/SLI070/SCR510/ SCR515/NCR875/NCR536	NIC830/NDF820/NDZ860/SDR431U/ SDF417U/NDF821/NDF831	SDF416U/SDF417U/SDR431U/ NDR890/NDF820/NDF821	SDF416U/SDF417U/SDR431U/ NDR890/NDF820/NDF821
Load	3-5 kg (6.6 lbs~11 lbs)	25 kg (55 lbs)	6 kg (13 lbs)	3 kg (6.6 lbs)	3 kg (6.6 lbs)

Accessories

Speed dome accessories



Model description	SAD701 In-ceiling mount	SAD702 Pendant pipe mount	SAD703 Wall mount bracket	SAD704 Wall mount bracket with junction box	SAD705 Pendant mount bracket with junction box
Construction	Steel	Aluminum	Aluminum	Stainless steel	Stainless steel
Color	White	White	White	White	White
Dimensions (LxWxH)	350 x 360 mm 13.8"x14.2"	120 x 268 x 214 mm 4.7"x8.4"x12"	246 x 140 x 223 mm 9.7"x5.5"x8.8"	350 x 236 x 477 mm 13.8"x9.3"x18.8"	236 x 342 x 556 mm 9.3"x13.5"x21.9"
Compatible	NIC900/SDS700 series SAD711 enclosure	NIC900/SDS700 series SAD711 enclosure	NIC900/SDS700 series SAD711 enclosure	SDS700/NIC900 series SAD711/SAD707/SAD708/ SAD709 mounting bracket	SDS700/NIC900 series SAD711/SAD707/SAD708/ SAD710 mounting bracket
Weight	2 kg (4.4 lbs)	0.6kg (1.3 lbs)	1.4 kg (31 lbs)	6.6 kg (14.5 lbs)	5.4 kg (12 lbs)
Load	4 kg (8.8 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	10 kg (22 lbs)

Speed dome accessories



Model	SAD706 Parapet wall mount	SAD707 Corner mount adaptor	SAD708 Pole mount adaptor	SAD709 Pipe extension	SAD710 Sunshield
Construction	Stainless steel	Aluminum	Aluminum	Stainless steel	SECC
Color	White	White	White	White	White
Dimensions (LxWxH)	280 x 954 x 445 mm 11"x37.6"x17.5"	377 x 260 x 179 mm 14.8"x10.2"x7"	240 x 260 x 60 mm 9.4"x10.2"x2.4"	62 x 500mm 2.4"x19.7"	257 x 189mm 10.1"x7.4"
Compatible	NIC900/SDS700 series SAD711 enclosure	SAB754/SAD703/ SAD704/SAD705/ NCR875/SAB755	SAB754/SAD703/ SAD704/SAD705/ NCR875/SAB755	SAD702/SAD703/SAD704/ SAD705/SAD706 mounting bracket	SDS700/NIC900/ SAD711 enclosure
Weight	3.2 kg (7 lbs)	1 kg (2.2 lbs)	1 kg (2.2 lbs)	1.4 kg (3 lbs)	0.6 kg (1.3 lbs)
Load	10 kg (22 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	-

Accessories

How to install your speed dome camera?

■ In ceiling mount



■ Appearance



■ Pendant pipe mount



■ Appearance



■ Simple wall mount



■ Appearance



■ Wall mount bracket with junction board and power box



■ Appearance



■ Parapet mount with junction board and power box



■ Appearance



■ Pole mount



■ Appearance



Accessories

How to install your speed dome camera?

■ Parapet wall mount



■ Appearance




■ Corner mount



■ Appearance



■ Power box with junction board

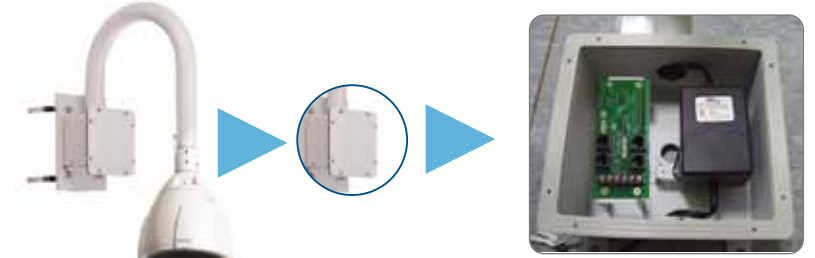

junction box

Easy installation and maintenance of spacious power box built-in junction board & additional power adaptor (optional)

■ Minimum ceiling load



Minimum ceiling load:
Approx. 3.6 kg (7.9 lb)

■ Surface mount load



Surface mount load:
Approx. 3.8 kg (8.4 lb)